

SLIDING SCREEN DOOR

Rite-Hite Doors offers the BUGSHIELD sliding screen door to help keep pests out and allows fresh air and daylight in.

Heavy-duty material

Strong, vinyl coated mesh is available in various colors and weave sizes.

Improve safety and security

Employees feel safer with a visual barrier that also deters theft and vandalism, and enables light to enter the work area.

Exceptional seal

Water resistant Hypalon® seals at the top and bottom. Nose seal further protects the opening.

Sliding door

Manually operated door slides open and closed horizontally on galvanized track and trolley system.

Exterior Design

Designed for exterior doorways and loading docks.

Personnel access

Dual-acting handle allows personnel access from either side of the opening.



SHIELD YOUR OPERATION FROM
UNWANTED INTRUDERS.

BUGSHIELD™ sliding screen door protects your loading dock openings and exterior doorways with a horizontal screen barrier. Its unique mesh design keeps pests out and allows fresh air and daylight in. Your employees will be more comfortable and productive. The BUGSHIELD door also improves safety, providing a visual barrier rather than an open doorway. With BUGSHIELD doors, theft and vandalism are discouraged.

BUGSHIELD is part of our full lineup of innovative door solutions. For more details on our full lineup of industrial, cold storage and impact doors, contact your Rite-Hite Doors Representative or call 1-800-456-0600.

Size

Minimum: 8' w x 8' h (2440 mm x 2440 mm)
 Maximum: 20' w x 18' h (6096 mm x 5490 mm)

Temperature range

-20°F to 140°F

Curtain material

- ▶ Heavy-duty vinyl coated mesh
- ▶ 17 x 11 weave, .025" thread diameter
- ▶ Available colors are safety yellow, red, blue and gray
- ▶ Optional 10 x 10 weave, .028" thread diameter, black

Curtain reinforcement

Tensile straps are sewn into the top, middle, and bottom of the curtain to limit stretch of screen mesh and increase the strength of the curtain.

Track and trolleys

Galvanized steel track and mounting hardware is standard. Trolleys have 1" steel wheels and are spaced every 12".

Seals

Water resistant Hypalon® seals at the top and bottom. Nose seal further protects opening.

Curtain storage

Protective storage sleeve helps keep curtain out of the way when not in use. Storage sleeve is 6' high and utilizes touch and hold for ease of adjustment.



Safety features

Door opens horizontally. Is a visual barrier at the opening, instead of an open doorway. Door latches in the closed position.

Warranty

Limited 1-year parts and labor. Rite-Hite Doors also offers an exclusive 1-year customer satisfaction money back guarantee.

Standard 5600 Sliding BugShield Screen Door

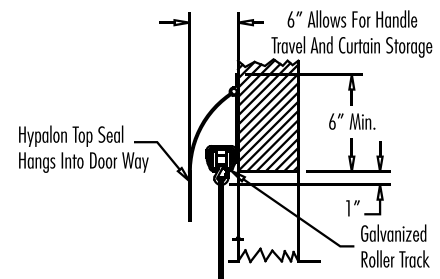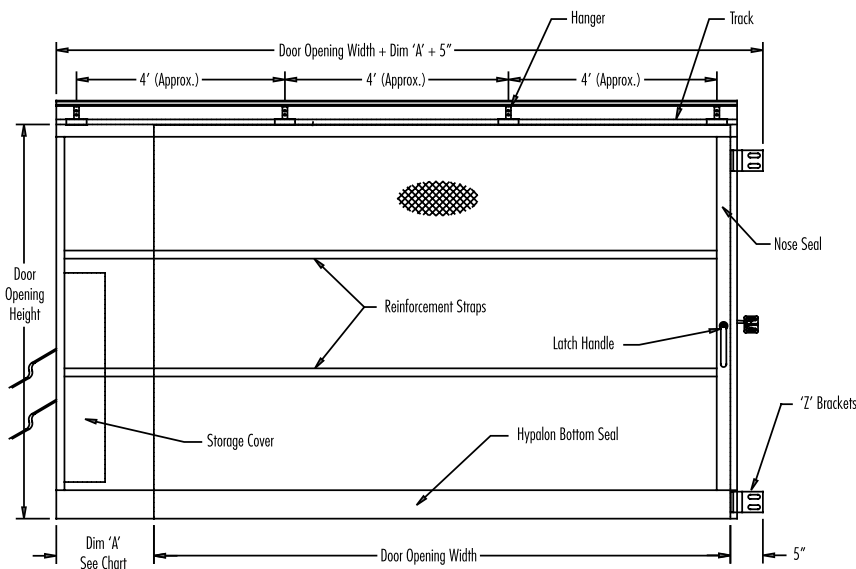

Detail View DIM "A"

Door Opening Width	DIM "A"
< 10' - 0"	24"
> 10' - 0" to 15' - 0"	30"
> 15' - 0" to 20' - 0"	36"
> 20' - 0" to 25' - 0"	42"



Rite-Hite Corporation

8900 North Arbon Drive Milwaukee, WI 53223 USA (414) 355-2600 (800) 456-0600 FAX: (414) 355-9248
 Mailing Address: Rite-Hite Corporation P.O. Box 245020 Milwaukee, WI 53224 USA

www.ritehite.com